

FEATURES

- AMBA® APB Compatible
- Prescale and non-prescale modes
- 4bit prescaler
- 8bit counter/accumulator
- Strobe and Data input for synchronization


LICENSED IP PACKAGE INCLUDES

- Verilog Source
- Complete Test Environment
- AHB Bus Functional Model
- C-Sample Code

DESCRIPTION

The APB PWM Module is a standard APB peripheral that generates a programmable duty cycle output signal. The frequency of the output waveform is either PCLK/256 or PCLK/4096, depending on whether a 4-bit prescaler is enabled. The duty cycle can be programmed with 8-bit resolution from either the APB interface or from an external controller interface. The output can be disabled or enabled. Disabling resets the counter to zero for the next enable.

GENERAL USE

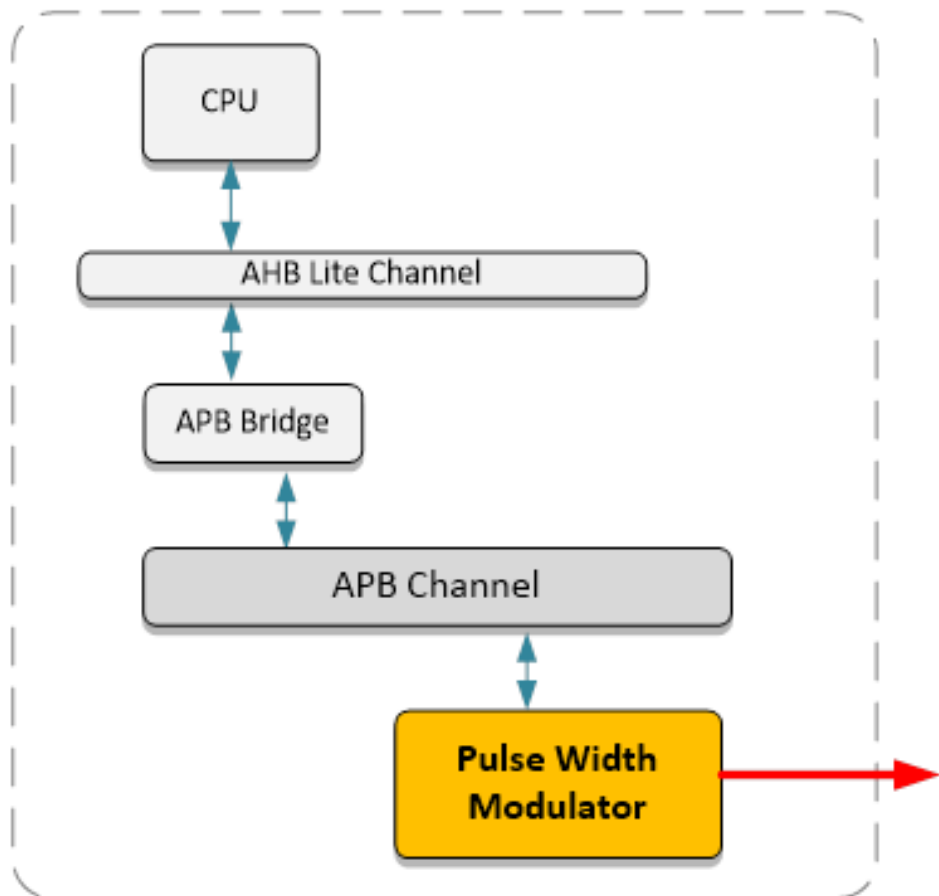

You may also be interested in:

AMBA® Subsystems

- Low Power Subsystem (simple AHB system)
- Low Power / Performance Subsystem (includes AHB Multi-matrix Fabric)
- Custom Performance Subsystem (includes AXI Multi-layer Fabric)

IP Cores

Infrastructure Cores

AHB Multi-Matrix Fabric
AHB/AHBLite Channel
AHB Arbiter
AXI Multi-Layer Fabric
AXI to AHBLite Bridge
AXI to APB Bridge
AHB to ABP Bridge
APB Channel

AXI Cores

AXI Multi-Layer Fabric
AXI to AHBLite Bridge
AXI to APB Bridge
AXI External Bus Interface
(Memory/Flash Controller)
AXI Internal Memory Controller
AXI QSPI with Execute in Place (XIP)

AHB Cores

AHB Channel
AHB Multi-Matrix Fabric
AHB to ABP Bridge
AHB Arbiter
AHB QSPI with Execute in Place (XIP)
AHB External Bus Interface
AHB Internal SRAM Controller
AHB Interrupt Controller
AHB DMA Controller
AHB DMA 4 Channel Controller
AHB TFT LCD Controller
AHB DES/TDES Encryption/Decryption

AHB Serial Flash Controller
Octal, Quad, Dual and Single Modes

Serial to AHB Bridge
SPI slave to AHB Master
Monitor/Control

APB Cores

APB Channel
APB Quad SPI Controller
APB General Purpose IO
APB Timer
APB UART
APB I2C (Master and Slave)
APB SPI
APB Watchdog Timer
APB Pulse Width Modulator
APB Real Time Clock

General

DES – Digital Encryption Standard
Triple DES (Low Gates)
Triple DES (pipelined)
ADC Interface (semi-custom)
Mixed-Signal Interfaces (semi-custom)
Power Management Unit (semi-custom)

AES Encryption Core

For more information contact



sales@socsolutions.com